
MODEL #100FSKRE CONCRETE PICNIC TABLE WITH SKATE DETERRENTS AND SIDE WHEELCHAIR ACCESS OUTDOOR CREATIONS, INC. CUSTOMER APPROVAL x

SCALE: 1" = 32"


DRAWN BY: MNC


MAN. TOL. +/- 1/4"



6" – 19["] 10" 32" 14" 86"

Integrally Cast Anti-Skateboard System



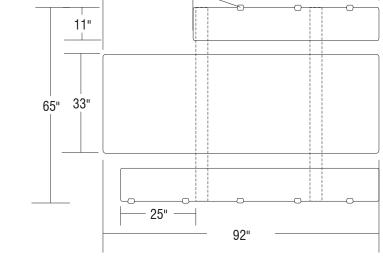

30 "

1. Concrete mix design to include a mixture of Portland Cement, 1. Concrete mix design to include a mixture of Portland Cemen water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.

2. Final product shall be reinforced with #4 and #5 rebar grid.

3. Product is cast in 1-piece with no assembly required.

4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material

- 5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
- 6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
- 7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.

WEIGHT: 2000 LBS TEXTURE: COLOR: SEALER:





OUTDOOR CREATIONS INC.

2270 Barney Street Anderson, CA 96007 (530) 365-6106 FAX (530) 365-5129