

OUTDOOR CREATIONS, INC. SCALE: 1" = 24"MODEL #717 -48"x108" CURVED RECTANGLE SIGN. DATF: DRAWN BY: MNC



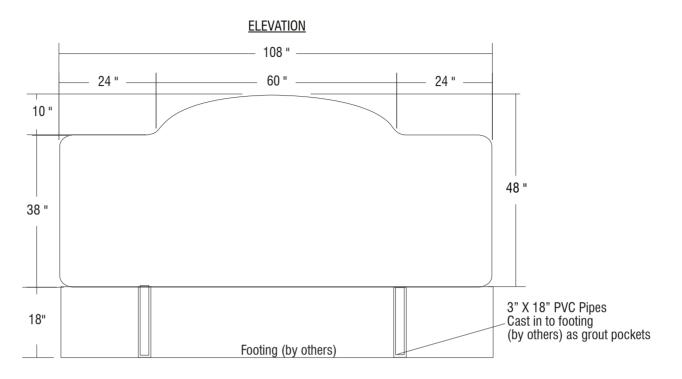

WEIGHT: 3500 LBS **TEXTURE:** 

COLOR: SEALER:

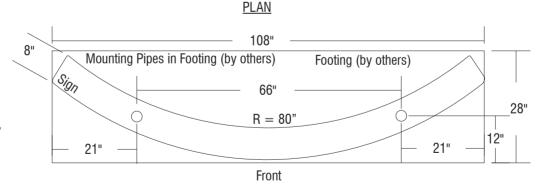

- 1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
- 2. Final product shall be reinforced with #4 and #5 rebar grid.
- Product is cast in 1-piece with no assembly required.
  Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material
- 5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
- 6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
- 7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.