
MODEL #729 S/D - 52"x109" SIGN WITH ROUND TOP, AND WOODGRAIN PEDESTALS

OUTDOOR CREATIONS, INC. CUSTOMER APPROVAL x

SCALE: 1" = 32" DRAWN BY: MNC

\*Posts seperate from sign, installation by others

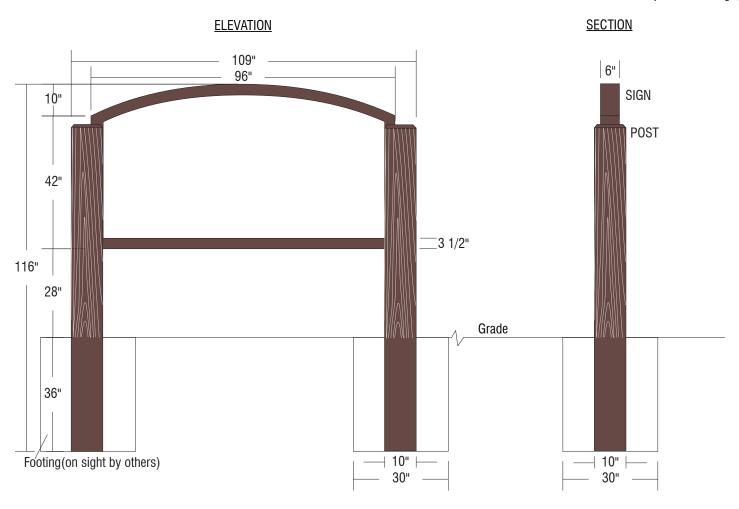

- Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive
- agents (when applicable) to yield a minimum compressive strength of 5000 psi.

  2. Final product shall be reinforced with #4 and #5 rebar grid.

  3. Sign panel is cast in 1-piece, sign/post assembly required.

  4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material
- 5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
- 6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
- 7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.

WEIGHT: 3970 LBS **TEXTURE:** 

COLOR: SEALER:



## OUTDOOR **CREATIONS** INC.

2270 Barney Street Anderson, CA 96007 (530) 365-6106 FAX (530) 365-5129