


PLAN VIEW

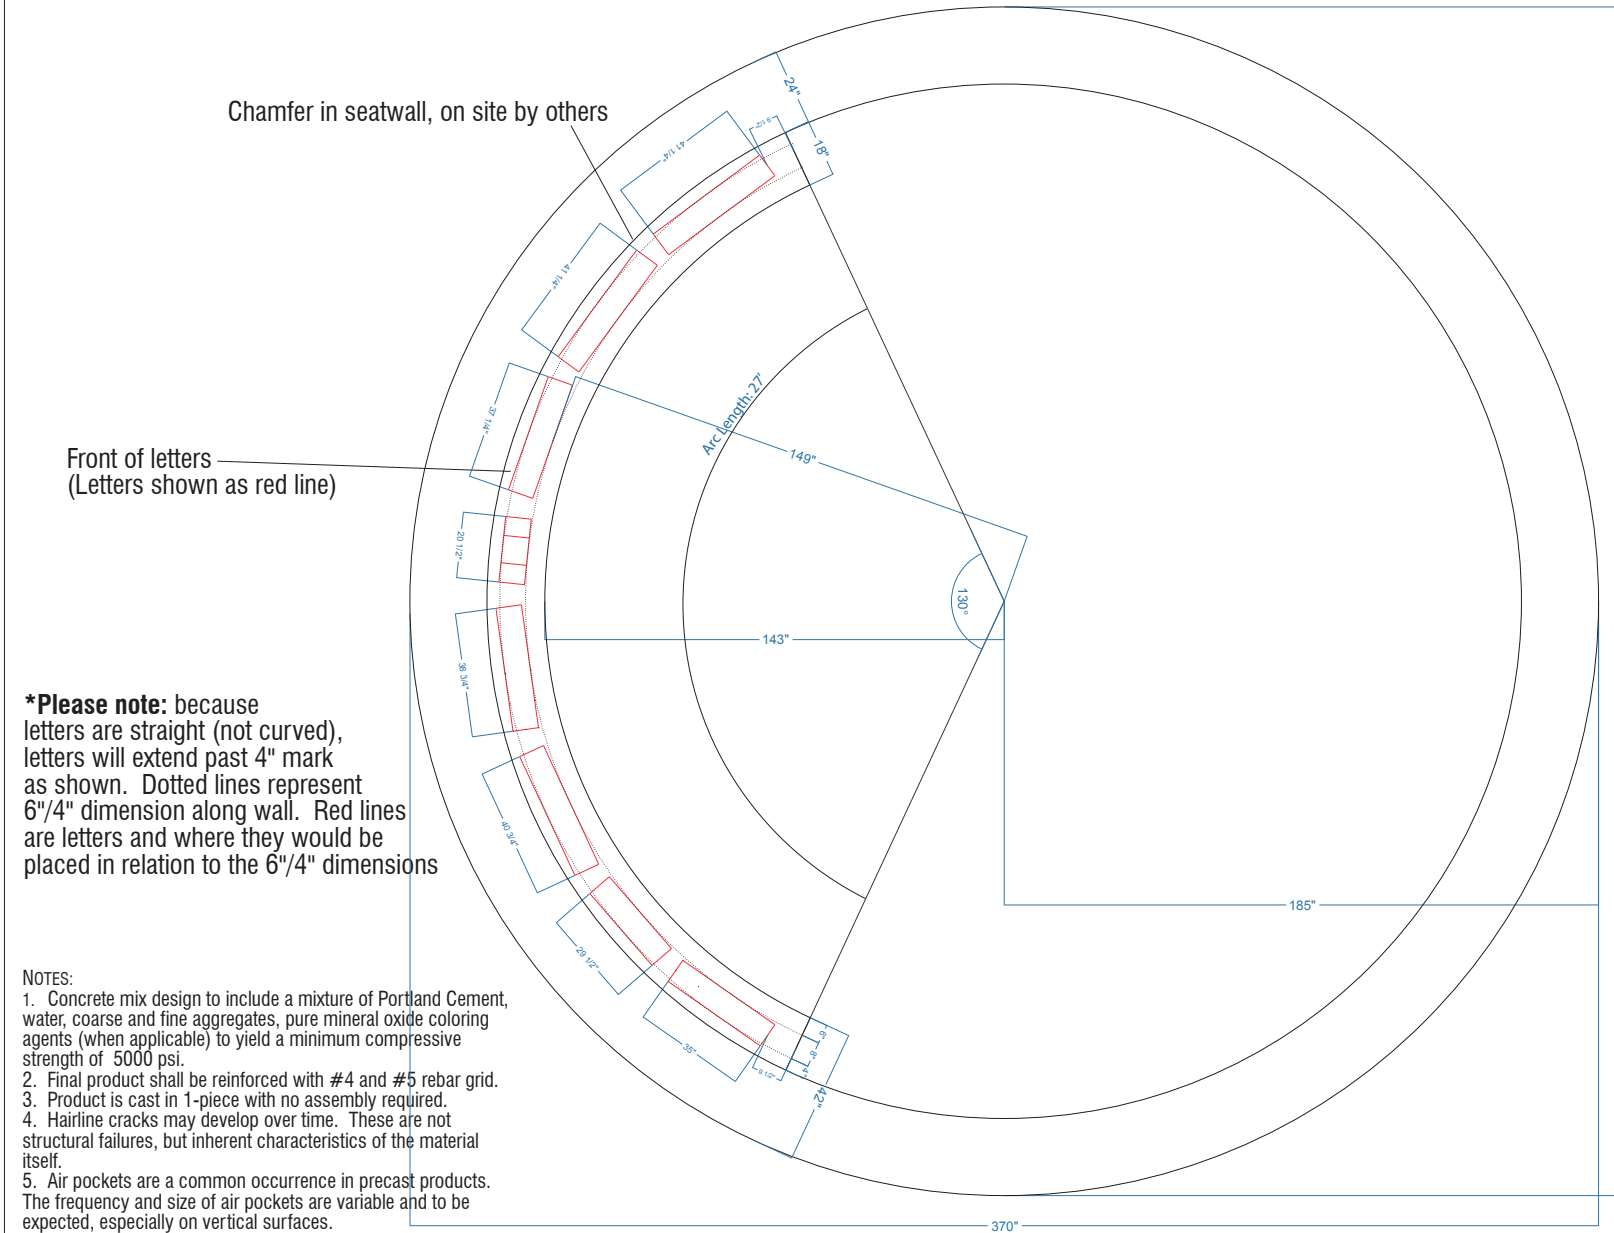

Chamfer in seatwall, on site by others

Front of letters  
 (Letters shown as red line)

**\*Please note:** because letters are straight (not curved), letters will extend past 4" mark as shown. Dotted lines represent 6 3/4" dimension along wall. Red lines are letters and where they would be placed in relation to the 6 3/4" dimensions

- NOTES:
1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
  2. Final product shall be reinforced with #4 and #5 rebar grid.
  3. Product is cast in 1-piece with no assembly required.
  4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material itself.
  5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
  6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
  7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.


Seatwall and grout pockets to be done on site by others

WEIGHT: TBD  
 TEXTURE: Smooth  
 COLOR: ODC Black  
 SEALER: Standard Acrylic



**OUTDOOR CREATIONS INC.**  
 2270 Barney Street  
 Anderson, CA 96007  
 (530) 365-6106  
 FAX (530) 365-5129

SECTION

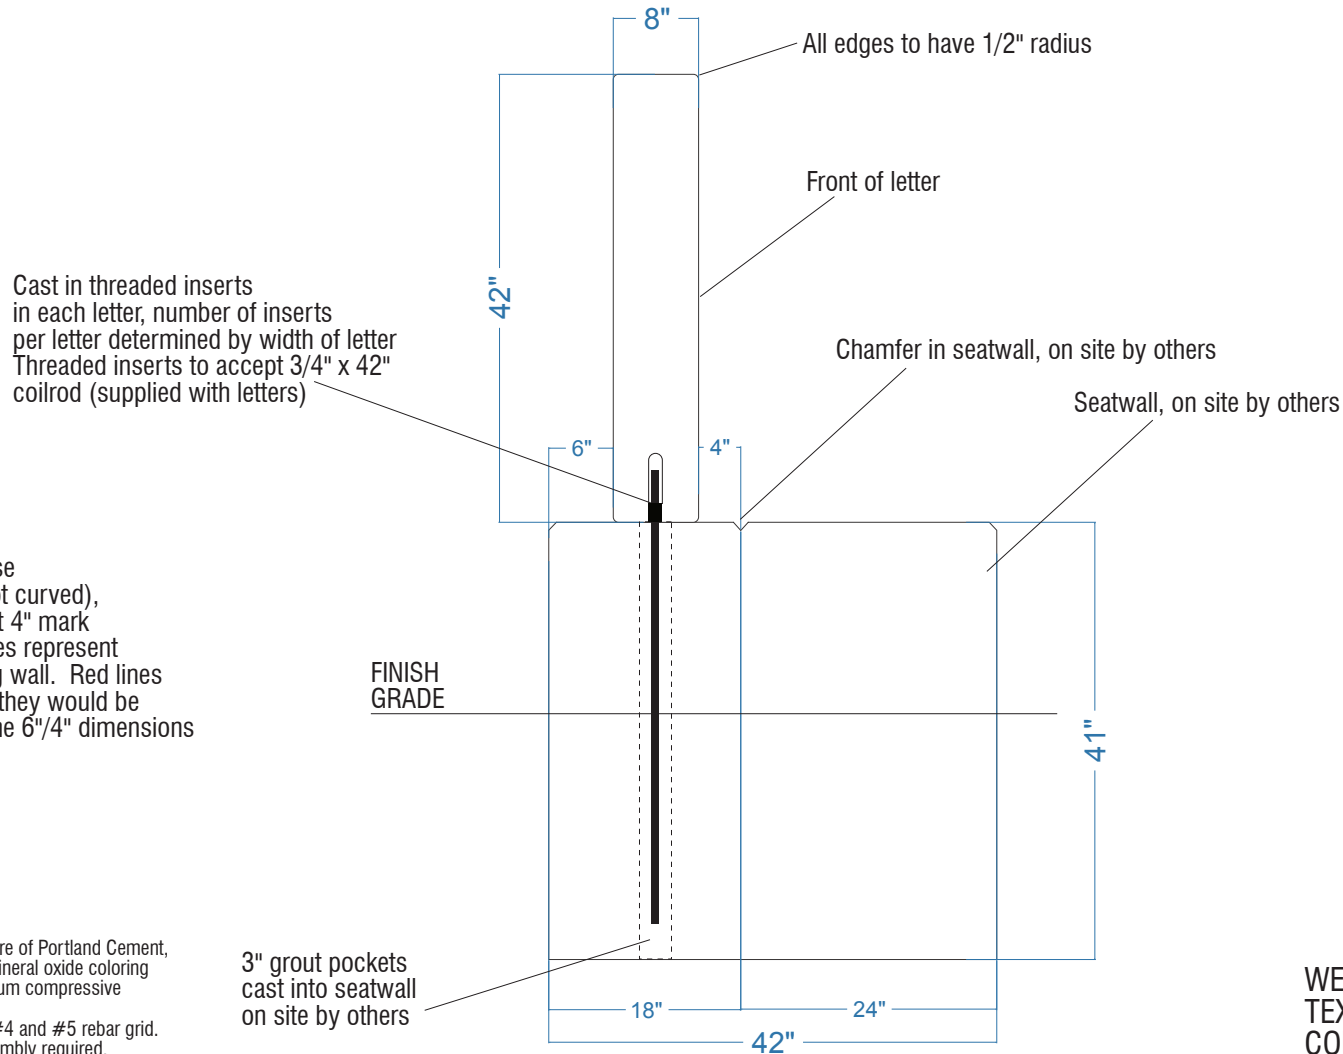


**\*Please note:** because letters are straight (not curved), letters will extend past 4" mark as shown. Dotted lines represent 6"/4" dimension along wall. Red lines are letters and where they would be placed in relation to the 6"/4" dimensions

NOTES:

1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
2. Final product shall be reinforced with #4 and #5 rebar grid.
3. Product is cast in 1-piece with no assembly required.
4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material itself.
5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.


3" grout pockets cast into seatwall on site by others

WEIGHT: TBD  
TEXTURE: Smooth  
COLOR: ODC Black  
SEALER: Standard Acrylic



**OUTDOOR CREATIONS INC.**  
2270 Barney Street  
Anderson, CA 96007  
(530) 365-6106  
FAX (530) 365-5129

ELEVATION

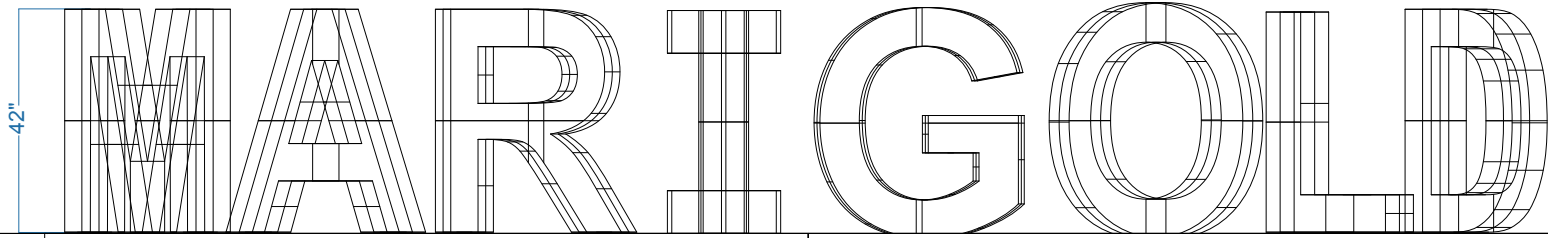

18"




Approximate 3D rendering  
See detail of letters for approval


NOTES:

1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
2. Final product shall be reinforced with #4 and #5 rebar grid.
3. Product is cast in 1-piece with no assembly required.
4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material itself.
5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.

WEIGHT: TBD  
TEXTURE: Smooth  
COLOR: ODC Black  
SEALER: Standard Acrylic



**OUTDOOR  
CREATIONS  
INC.**  
2270 Barney Street  
Anderson, CA 96007  
(530) 365-6106  
FAX (530) 365-5129

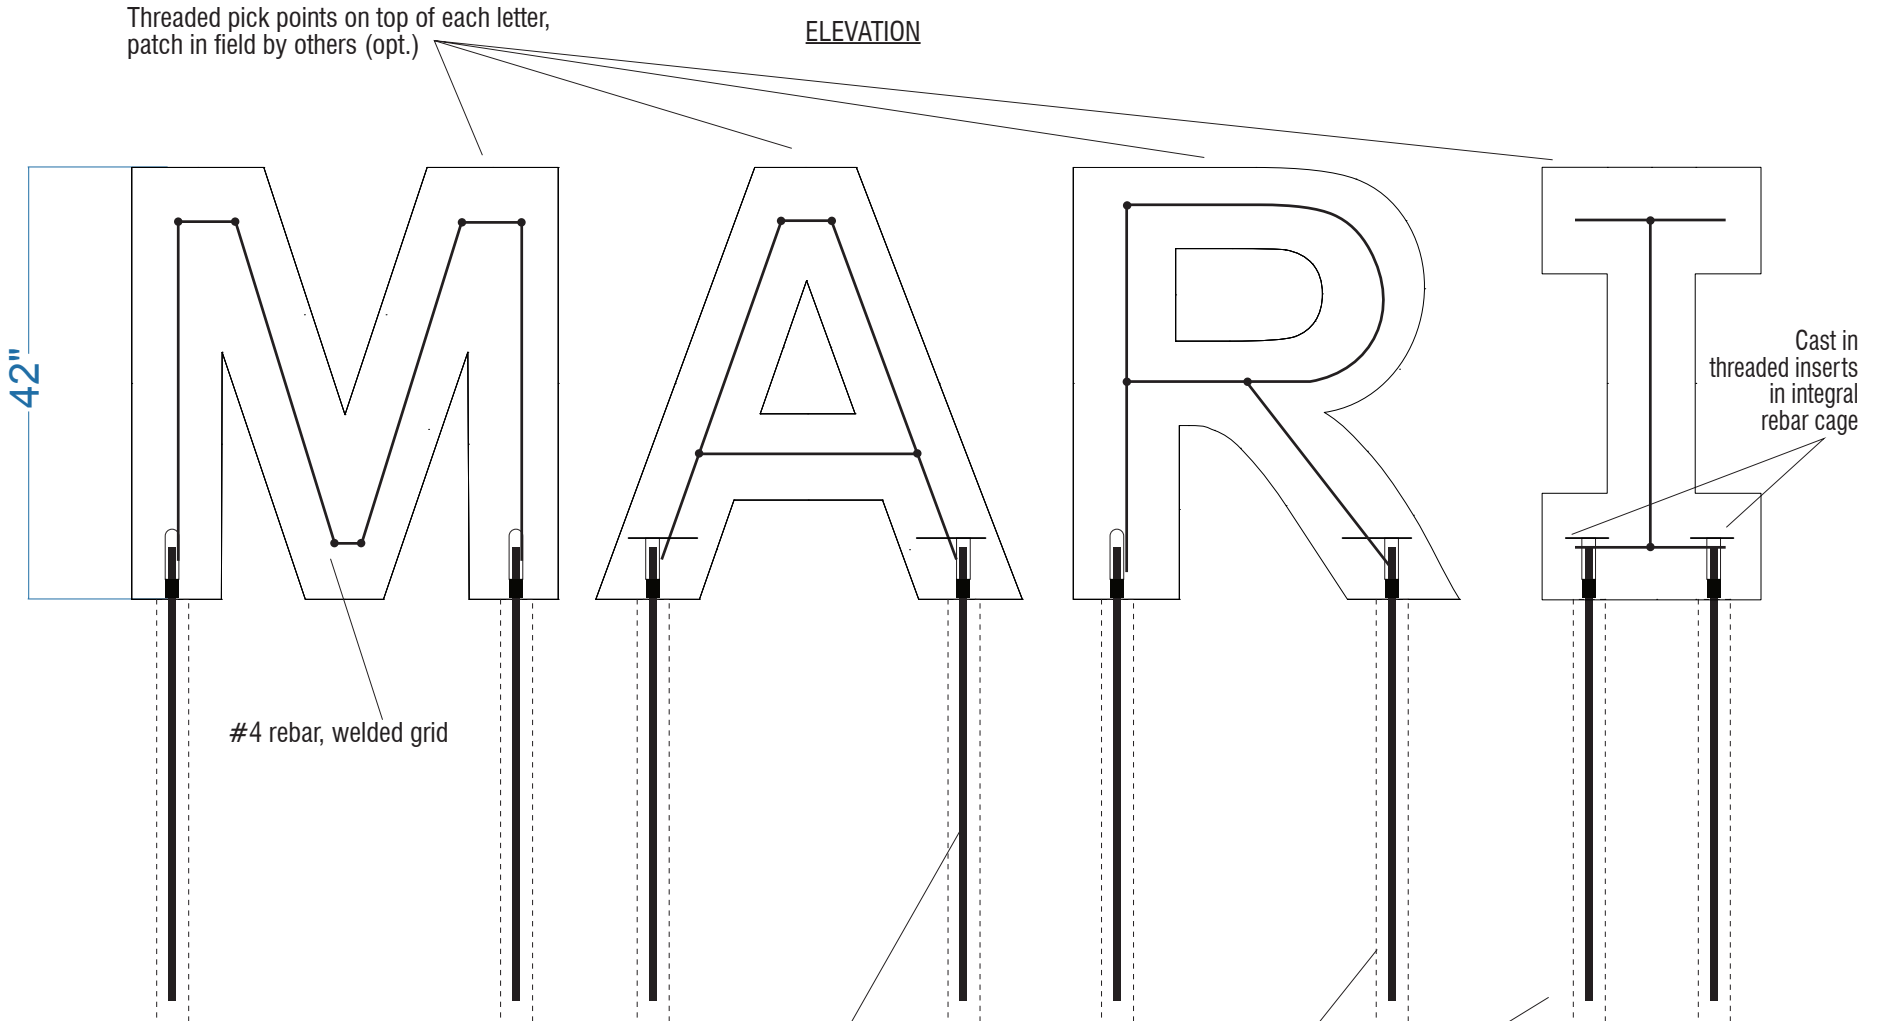


- NOTES:
1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
  2. Final product shall be reinforced with #4 and #5 rebar grid.
  3. Product is cast in 1-piece with no assembly required.
  4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material itself.
  5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
  6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
  7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.

Cast in threaded inserts in each letter, number of inserts per letter determined by width of letter  
 Threaded inserts to accept 3/4" x 42" coilrod (supplied with letters)

Grout pockets cast into seatwall on site by others  
 Coilrod to go through entire height of seatwall


WEIGHT:  
 M - 900 LBS, A - 600 LBS  
 R - 750 LBS, I - 400 LBS  
 TEXTURE: Smooth  
 COLOR: ODC Black  
 SEALER: Standard Acrylic



**OUTDOOR CREATIONS INC.**  
 2270 Barney Street  
 Anderson, CA 96007  
 (530) 365-6106  
 FAX (530) 365-5129

Threaded pick points on top of each letter,  
patch in field by others (opt.)

ELEVATION

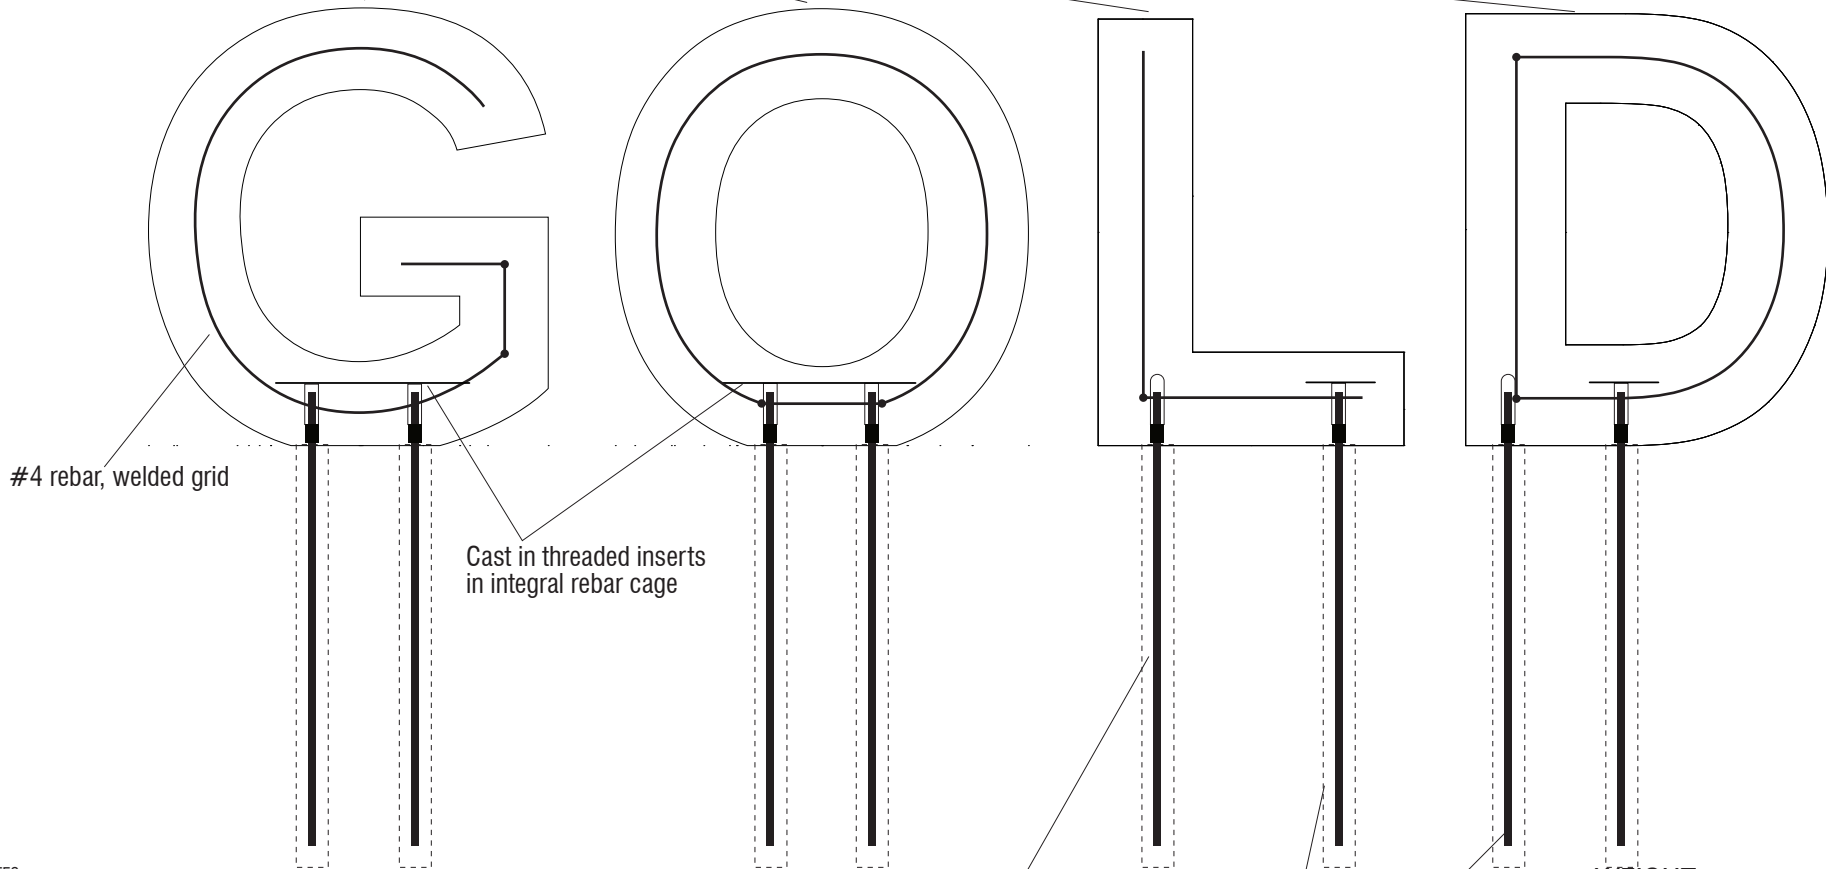

#4 rebar, welded grid

Cast in threaded inserts  
in integral rebar cage

NOTES:

1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
2. Final product shall be reinforced with #4 and #5 rebar grid.
3. Product is cast in 1-piece with no assembly required.
4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material itself.
5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.

Cast in threaded inserts  
in each letter, number of inserts  
per letter determined by width of letter  
Threaded inserts to accept 3/4" x 42"  
coilrod (supplied with letters)


Grout pockets cast into seatwall  
on site by others  
Coilrod to go through entire height of seatwall

WEIGHT:  
G - 950 LBS, O - 771 LBS  
L - 400 LBS, D - 750 LBS  
TEXTURE: Smooth  
COLOR: ODC Black  
SEALER: Standard Acrylic



**OUTDOOR  
CREATIONS  
INC.**  
2270 Barney Street  
Anderson, CA 96007  
(530) 365-6106  
FAX (530) 365-5129

PLAN

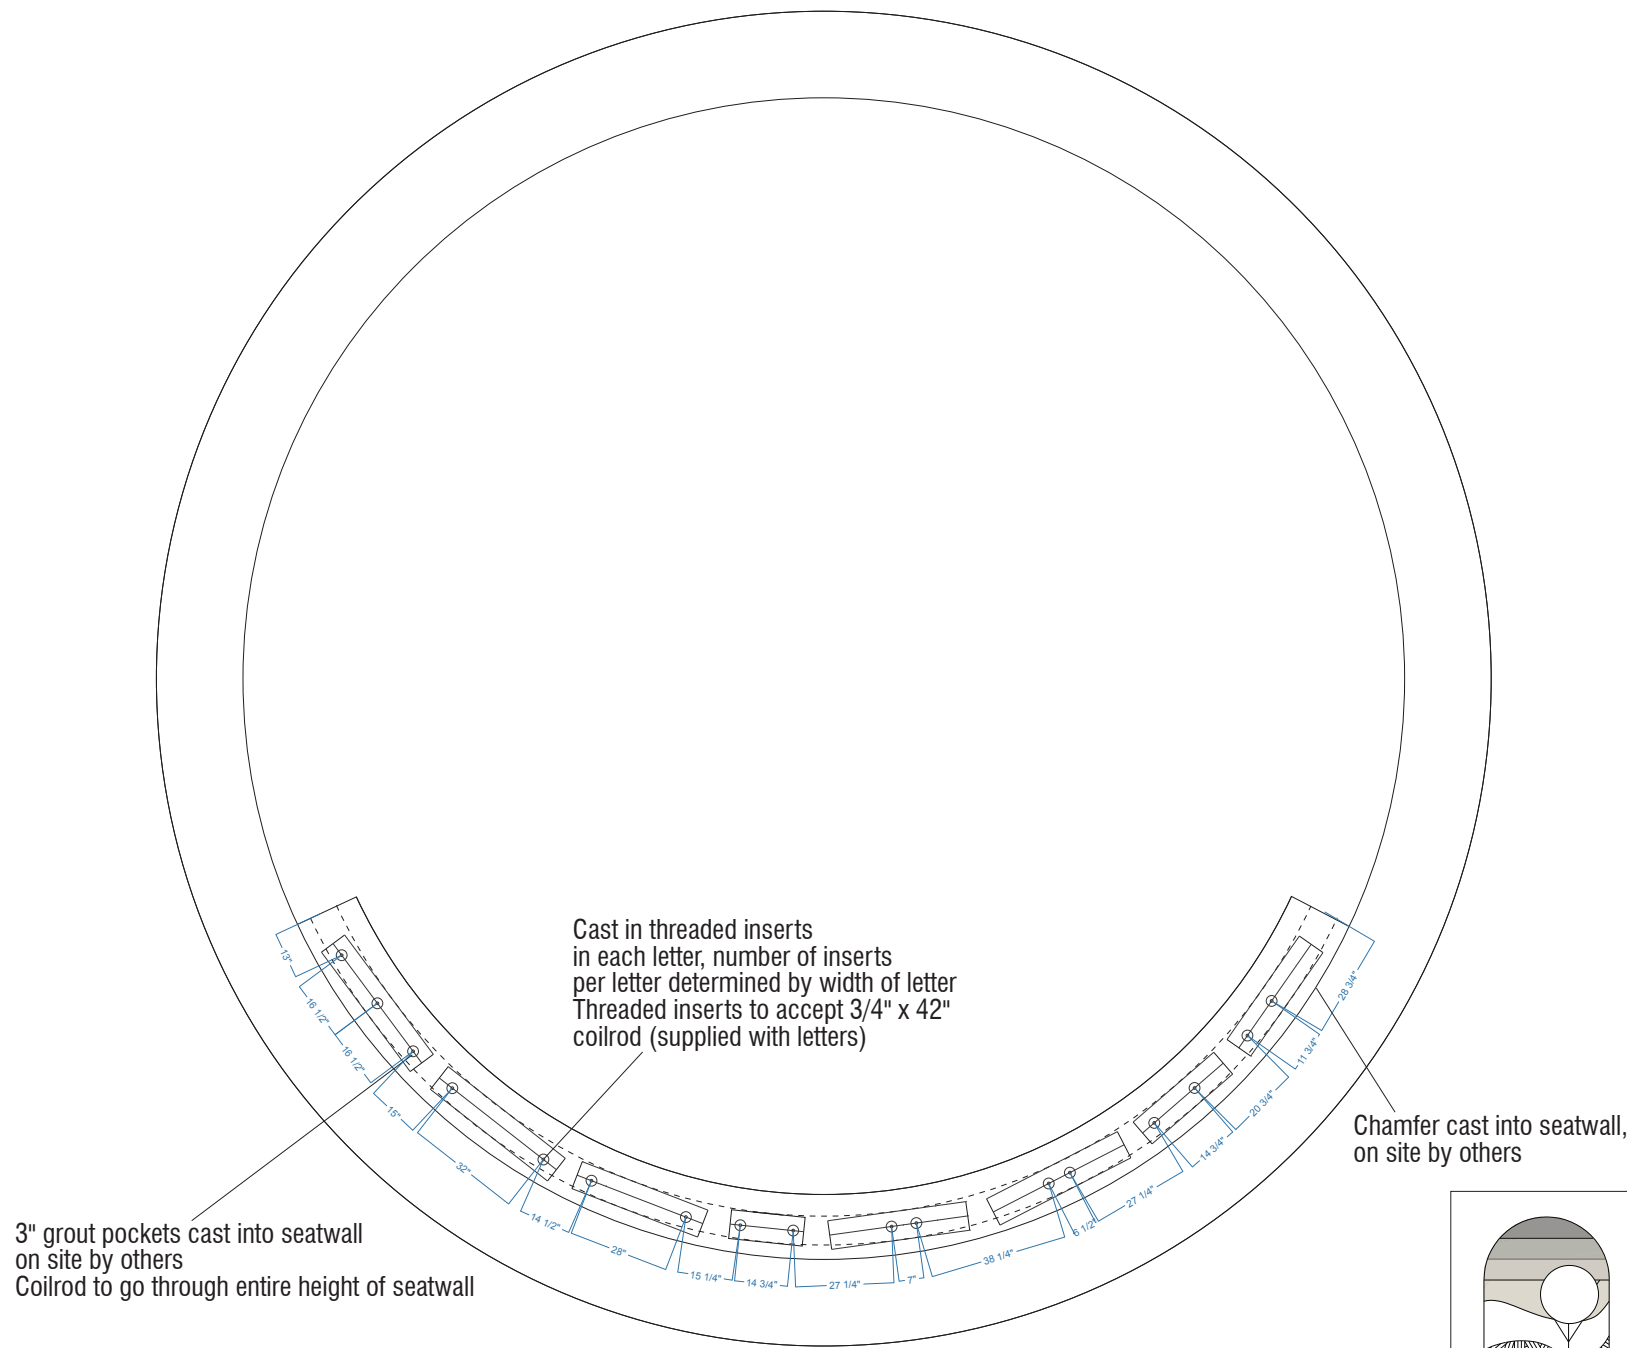

**OUTDOOR CREATIONS INC.**  
2270 Barney Street  
Anderson, CA 96007  
(530) 365-6106  
FAX (530) 365-5129