MODEL #101FSRRE CONCRETE PICNIC TABLE WITH RIGHT SIDED WHEELCHAIR ACCESSIBLITY WITH ROCK TEXTURE LEGS


OUTDOOR CREATIONS, INC. CUSTOMER APPROVAL x

SCALE: 1" = 32"

DRAWN BY: MNC

MAN. TOL. +/- 1/4"

14" 10" (2) 3/4" x 14" coil rods (provided) to correspond 30" to in footing grout pockets (by others)

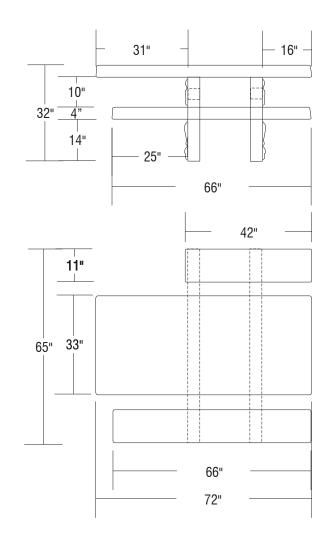

- 1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
- Final product shall be reinforced with #4 and #5 rebar grid.
 Product is cast in 1-piece with no assembly required.
- Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material
- 5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
- 6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
- 7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.

*TABLE MUST BE MECHANICALLY ATTACHED TO MOUNTING SURFACE



WEIGHT: 1650 LBS **TEXTURE:** COLOR: SEALER:



OUTDOOR **CREATIONS** INC.

2270 Barney Street Anderson, CA 96007 (530) 365-6106 FAX (530) 365-5129